
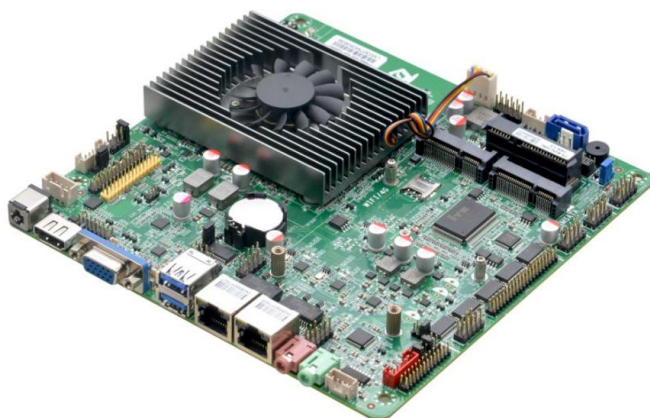


ITX-B430_I526L VER:1.5



Model No.	ITX-B430_I526L VER:1.5(4300U)
Processor	Supports Intel®Haswell-U I5-4300U/1.9GHz Dual core Quad thread, TDP 15W
	Compatible with Intel Celeron,Pentium,Core®I3/I5/I7 Haswell/Broadwell-U processor
Chipset	based on Intel®Haswell-U/Broadwell-U SOC platform
Memory	1* SODIMM slot, supports 1600/1333MHz DDR3L/1.35V memory, up to 8GB
Display	Integrated Intel® HD Graphics 4400
	1* VGA, 1*HDMI, 1*LVDS (supports dual channels 24BIT),1*EDP (choose LVDS or EDP)
	Support independent display, dual display mode, extended mode
Ethernet	2* RTL8111H Gigabit Ethernet ,supports Wake on LAN/PXE function
Storage	1* SATA3.0 2.5'' Laptop hard drive
	1* 7pin SATA3.0, the transfer rate is up to 6Gbps
Audio	Onboard ALC262 6 channel high fidelity audio controller, supports MIC and Line-out and power amplifier
	Suggest power amplifier 2Ω5W horn
Expansion Slot	1* Mini-PCIE, supports WIFI/3G module
	1* MSATA slot, supports Intel protocol SSD ,the transfer rate is up to 6Gbps
	Note: If MINIPE1 need to support 3G module,need to adjust the relevant hardware settings, and it will cause F_USB2 to only support 1 USB
Rear I/O interface	1* 12V DC JACK power input interface
	1* HDMI
	1* VGA
	2* USB 3.0
	1* RJ-45 Gigabit Network Interface
	1* Line out (Green)
	1* MIC (Red)
Built in I/O interface	1* JVGA1, 1*12Pin (Same signal as DB15)
	1* J_HDMI, 2*8pin(the same signal as the backplane IO interface HDMI)
	1* Supports dual channels 24bit(dual 8), LVDS 2*15pin
	1* LVDS Backlight power supply interface, 1*6pin
	1* EDP, 2*15pin (Yellow) (EDP and LVDS interfaces are self-adaptive and choose one)
	1* Front audio interface, 2*5pin

	1* Front power amplifier interface, 1*4Pin
	4* USB 2.0, 2*5Pin
	6* RS232 COM, 2*5pin , COM1/COM2 supports the 9 th pin charged,COM2 supports RS485/422
	1* LPT, 2*13pin
	1* PS/2 keyboard and mouse interface, 1*6Pin
	1* Hard disk power supply interface, 1*4pin
	1* SIM
	1* Front panel function button and indicator light interface, 2*5pin
	1* 4pin ATX
Fan Connector	1* 4pin CPU smart fan connector, 1* 3pin system fan connector
GPIO	Support 4-way input output GPIO function
BIOS	AMI 64Mb Flash ROM
Watchdog	Support hardware reset function (L256, 0~255 seconds)
OS	Windows 7/Windows 10/Linux
Power Type	DC_12V single power input
Working temperature	-10℃～60℃
Storage temperature	-20℃～70℃
Working Humidity	5%-95%(relative humidity, non-condensing)
Dimension	170mm x 170mm

Order information:

No	Model	Processor	Frequency	Memory	VGA	HDMI	LVDS	EDP	LAN	USB	COM	RS485	Power
1	ITX-B430_I312L VER:1.5(4030U)	I3-4030U	1.9G	1*SODDDR3L	1	1	2ch*24bit	1	1*8111H	8	2	COM2	DC12V
2	ITX-B430_I316L VER:1.5(4120U)	I3-4120U	2.0G	1*SODDDR3L	1	1	2ch*24bit	1	1*8111H	8	6	COM2	DC12V
3	ITX-B430_I526L VER:1.5(4300U)	I5-4300U	1.9G	1*SODDDR3L	1	1	2ch*24bit	1	2*8111H	8	6	COM2	DC12V
4	ITX-B430_I512L VER:1.5(4300U)	I5-4300U	1.9G	1*SODDDR3L	1	1	2ch*24bit	1	1*8111H	8	2	COM2	DC12V