
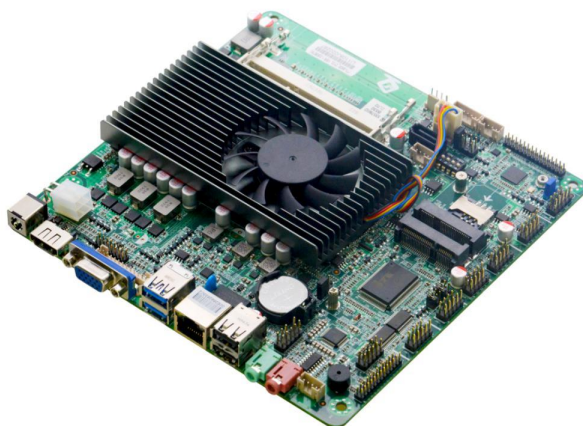



ITX-B530_D12L VER:1.0

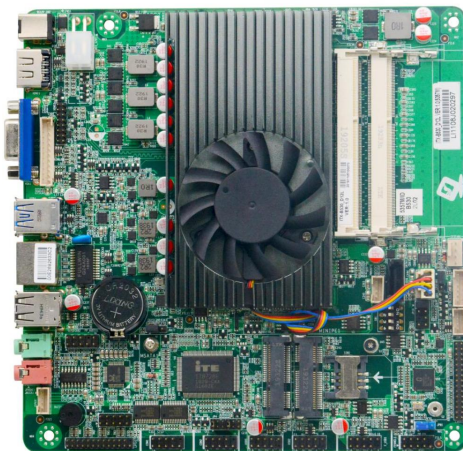

Model No.	ITX-B530_D12L VER:1.0(5357M)
Processor	Integrated AMD A6-5357M@2.9G Dual core Dual thread processor, TDP35W
	Compatible with APU A10/A8/A6/A4(FP2 encapsulation) Dual-core, quad-core processor
Chipset	A70(218-0755097) High speed chipset
Memory	2* SODIMM slot, supports dual channels DDR3 1333MHz memory, up to 16GB
Display	Integrated AMD Radeon HD 8000
	1* VGA, 2*HDMI, 1* LVDS, supports dual channels 24BIT
Ethernet	1* RTL8111H Gigabit Ethernet ,supports Wake on LAN/PXE function
Storage	1* SATA3.0,the transfer rate is up to 6Gbps
	1* MSATA, supports Intel protocol SSD, the transfer rate is up to 6Gbps
Audio	Onboard ALC662 6 channels high fidelity audio controller, supports MIC,Line-out and power amplifier
	Suggest power amplifier 2Ω5W horn
Expansion Slot	1* Mini-PCIE, supports WIFI,3G/4G module
Rear I/O interface	2* USB 2.0
	2* USB 3.0
	1* HDMI
	1* VGA
	1* RJ-45 Gigabit Network Interface
	1* Line out （Green）
	1* MIC （Red）
	1* DC 12V power input interface
Built in I/O interface	1* JVGA, 1*12pin (same signal as DB15)
	1* JHDMI, 2*8Pin
	1* LVDS, 2*15pin
	1* Backlight power supply interface, 1*6pin
	1* Screen brightness adjustment interface,1*4pin
	6* USB 2.0, 2*5pin
	2* RS232 COM, supports the 9 th pin charged
	1* LPT,2*13pin
	1* Front audio interface, 2*5pin

	1* Power amplifier interface, 1*4pin
	1* Front panel function button and indicator light interface, 2*5pin
	1* SIM card slot
	1* 4pin ATX (can be used as 12V input and output power interface)
	1* Hard disk power supply interface, 1*4pin
Fan Connector	1* 4pin CPU smart fan connector, 1*4Pin system smart fan connector
GPIO	Support 4-way input output GPIO function
BIOS	32Mb Flash ROM
Watchdog	Support hardware reset function (L256, 0~255 seconds)
Power Type	DC 12V single power supply
Working temperature	-10℃～60℃
Storage temperature	-20℃～70℃
Working Humidity	5%-95%(relative humidity, non-condensing)
Dimension	170mm x 170mm

Order information:

No.	Model	Processor	Frequency	Memory	VGA	HDMI	LVDS	LAN	USB	COM	Power
1	ITX-B530_NL VER:1.0(5345M)	5345M	2.2G	2*SODDR3	1	2	/	1*RTL8111H	10	2	DC/12V
2	ITX-B530_D12L VER:1.0(5357M)	5357M	2.9G	2*SODDR3	1	2	2ch/24BIT	1*RTL8111H	10	2	DC/12V