


R67E

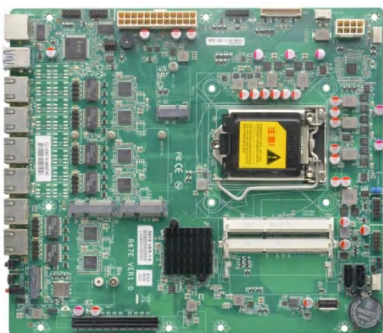


Main Features

- Support LGA1155 socket Intel Celeron/Pentium/Core i3/i5/i7 processors
- 2x DDR3 RAM slot, up to 32GB
- 6x RJ45 GbE ports
- 1x VGA , 1x HDMI
- 2x SATA3.0; 1x MSATA3.0 SSD
- 1x Mini-PCIE(WIFI / TPM-4COM); 1x PCIE X8
- 4x USB; 2x COM; 1x SIM
- ATX power input

Specification :

Model No.	R67E VER:1.0(LGA1155)
Processor	Support LGA1155 2th/3th Intel® Celeron/Pentium/Core™ i3/i5/i7 processor
Chipset	Intel B75 Express Chipset
Memory	2x DDR3 SODIMM slot, supports dual channel 1600/1333/1066MHz memory, up to 32GB
Graphics	Intel®HD Graphics 1x HDMI, 1x VGA
Network	6x Intel I210AT Gigabit network card, support network wake-up、PXE function
Storage	2x SATA2.0 , transmission rate up to 3Gbps 1x MSATA3.0 slot, supports Intel protocol SSD solid state drive, transmission speed up to 6Gbps
Audio	N/A
Expansion slots	1x Mini-PCIE slot, supports WIFI /TPM-4COM module, BIOS needs to be modified for TPM-4COM function 1x M.2 slot,support M.2 Key B 2242/2252 5G module 1x M.2 slot,support M.2 Key E 2230 WIFI module 1x PCIE X8 slot
Rear I/O interface	1x RJ45 serial port (co-aligned with the built-in serial port pin header) 2x USB3.0 6x RJ45 Gigabit network interface 1x power switch, 1x one-key restore 1x double-layer LED light, (upper red and lower green, upper hard disk light, lower power light)
Built in I/O interface	1x JVGAI, 1*12pin 1x JHDMI, 2*8pin 2x USB2.0, 2*5pin 1x Vertical USB2.0 interface 1x RS232 serial port 2*5pin, support RS485 1x GPIO pin header (four in and four out) 1x Front panel switch button and indicator light interface 2*5Pin 1x 24pin ATX power interface 1x 2*4pin ATX power interface 1x SIM card slot
Fan interface	1x 4pin CPU smart fan interface, 2x 4pin system fan interface
Power input	Powered by ATX power supply
BIOS	128Mb Flash ROM
GPIO	Supports 4 input and 4 output GPIO interfaces
Watchdog	Support hardware reset function (256 levels, 0~255 seconds)

OS	Windows 7/Windows 10/Linux
Working Temp.	-10℃～60℃
Storage Temp.	-20℃～70℃
Working Humidity	5%-95%(relative humidity; non-condensing)
Dimension	245mm x 215mm

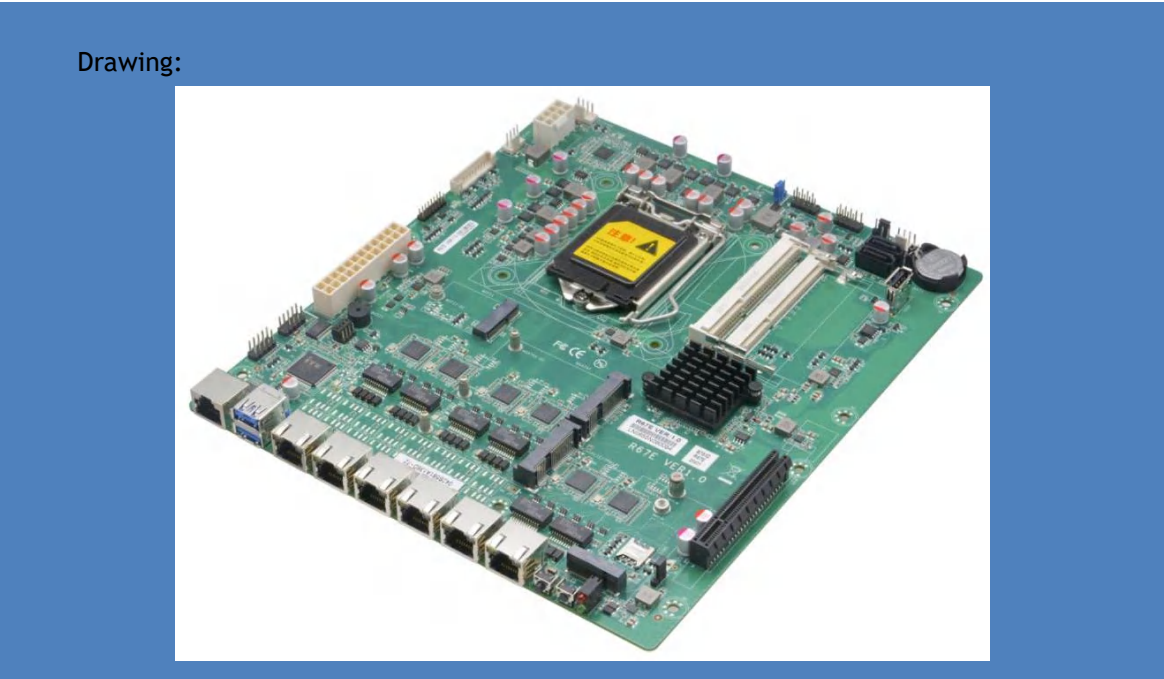

Ordering info:

No.	Model	Processor	Southbridge	Memory	VGA	HDMI	DP	LAN	USB	COM	RS485	Power
1	R67E VER:1.0	LGA1155	B75	2*SODDDR3	1	1	/	6*I226V	4	2	1	ATX